ODF-1U-8F

1U 19" Fixed 8-Port Integrated Chassis

1. Product overview

This is a standard 1U rack-mount fixed chassis with a cold-rolled steel body, intended for telecom rooms, industrial control, low-voltage integration and data access applications. Eight port positions sit on the front panel; removing the front cover gives access to the splice tray for splicing and maintenance. Rigid structure and a shallow 250 mm depth.

2. External dimensions (mm)

Height	44.2 mm (1U)	Width	482 mm (19 inch)
Depth	250 mm	Port positions	8
Mounting	19-inch rack mounting, with rack ears on both ends		

3. Construction & materials

Body material	Quality cold-rolled steel
Surface finish	Electrostatic powder coating
Chassis type	Fixed structure, front cover removable
Adapter mounting	8 port positions on the front panel
Splice trays	1 tray, fixed inside the body
Cable entry	4 round entry ports with cable clamps
Cooling	Natural convection
Protection	Basic dust-proof and touch-proof

4. Features

- Standard 1U height and only 250 mm deep — fits shallow cabinets
- Fixed structure; remove the front cover to reach the splice tray
- 8 standard port positions; accepts SC / LC / FC / ST adapters and pigtails
- Up to 8 cores single-position, 16 with SC or LC dual-position, 32 with LC four-position
- Generous cable-management space — pigtails stay inside the cover
- All-metal structure — high strength and good interference resistance

5. Outline drawing

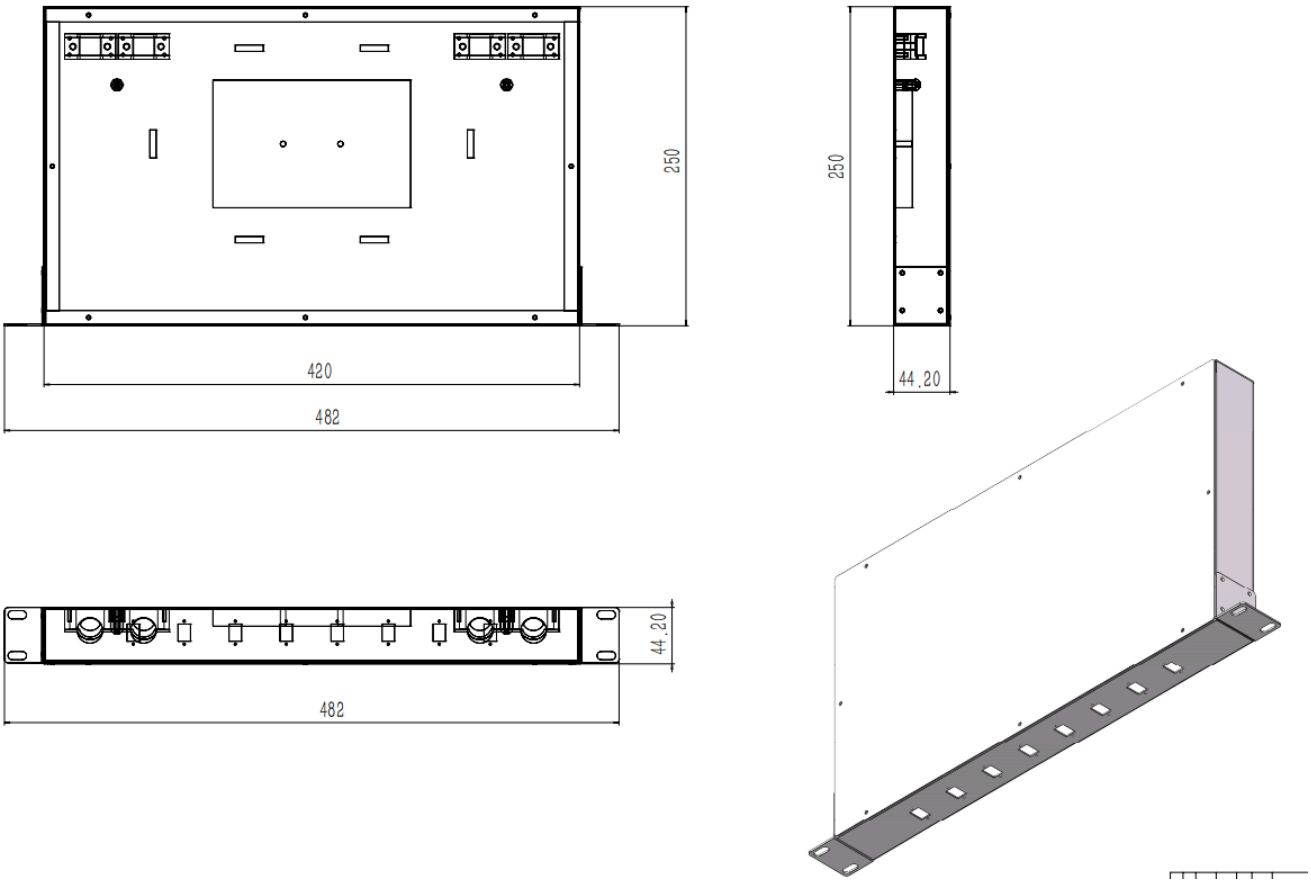

Body 482 × 250 × 44.2 mm; 8-port front panel and internal splice tray.

6. Applications

Telecom room rack integration · industrial control port aggregation · low-voltage box / cabinet port management · data access units and security surveillance integration.

7. Notes

All dimensions in mm. Colour, marking and port types can be customized on request. This specification is prepared from the product drawing.

Quotation, samples and customization: zhaozhixing1991@gmail.com · +86 131 5743 6668 · No. 13 Guzhong Road, Guyaopu Village, Zhangqi Town, Cixi, Ningbo, Zhejiang, China